



Journal of Agri-Food and Applied Sciences

Available online at jaas.blue-ap.org

©2014 JAAS Journal. Vol. 2(9), pp. 292-295, 30 September, 2014

E-ISSN: 2311-6730

Effect of magnetizing technology on the drip irrigation system hydraulic performance and emitter clogging

Shaker BA^{1*}, Saeed AB² and Ahmed Al-Khalifa BA³

1-Project Implementation Unit, Khartoum New International Airport, P.O.Box 216, Khartoum, Sudan

2-Department of Agricultural Engineering, Faculty of Agriculture, University of Khartoum, Shambat, Sudan

3-Horticultural Research Center, Agricultural Research Corporation, P.O.Box 126, Wad Medani, Sudan

Corresponding Author: Shaker BA

Received: 05 August, 2014

Accepted: 20 August, 2014

Published: 30 September, 2014

ABSTRACT

The experiment was conducted during 2006 and 2007 in the Demonstration Farm of the Faculty of Agriculture, University of Khartoum, Sudan to evaluate the effect of magnetizing technology on the hydraulic performance of drip irrigation system and emitters clogging under using four types of waters treated wastewater (WW), normal water (NW), magnetized wastewater (MWW) and magnetized normal water (MNW). The emitters average discharges during two years were 3.46, 2.65, 3.75 and 3.33 with NW, WW, MNW and MWW, respectively. The emission uniformity for two years 89% 71%, 96.5% and 87% with NW, WW, MNW and MWW respectively. The irrigation efficiencies were high with MNW, NW, MWW and WW respectively, in the first and second year

Keywords: *drip irrigation system, treated wastewater, magnetized wastewater, emission uniformity, irrigation efficiency.*

©2014 JAAS Journal All rights reserved.

INTRODUCTION

Irrigated agriculture is the largest consumer of water in the world. In areas with dry climate, irrigation water amount to 50-85% of total water use (Hamdy, 2001). Where it is more difficult to meet the agricultural water demand with conventional water resources, wastewater reuse represents a viable option (Capra and Scicolone, 2004). Reuse of wastewater for irrigation is increasingly gaining popularity worldwide as one of the non-conventional water resources targeted to overcome the envisaged international water crises. The treatment and reuse of the wastewater can improve a potential cause of environment, ground and surface water pollution and at the same time can help in solving the expected water scarcity (Eltoum ., 1998). Wastewaters from industries and municipalities, organic sludge and animal manures should be considered as resources rather than wastes that need to be put out of sight (Omer, 2003).

Drip irrigation slowly and regularly applies water and fertilizers directly to the root zone of plants through a network of economically designed plastic pipes and low discharge emitters. The advantage of using a drip-irrigation system is that it can significantly reduce soil evaporation and increase water use efficiency by creating a low wet area in the root zone (Haijun and Guanhua, 2009). The use of wastewater for irrigation purposes is being established as a future alternative in those areas where there is heavy competition for water. In this perspective, the irrigation system that has more advantages in terms of the environment and public health is drip irrigation. Despite these advantages, drip irrigation has a serious limitation in that the emitters tend to clog which affects the water application uniformity. Filtration is a key aspect in drip irrigation with wastewater but this does not prevent emitters to clog (Puig-Bargues . 2005). To prevent emitter clogging, some methods have been used on both experimental and on field scales. Filtering and flushing drip lines are simple and useful methods to prevent emitter clogging, particularly for physical clogging (Nakayama and Bucks, 1991). Filtering can prevent inorganic particles and organic materials

suspended in water from entering the drip-irrigation system. Flushing drip lines can clear the inorganic and organic materials precipitated in emitter orifices and on the inside-wall of drip hoses out of the system. Chemical clogging can be controlled with acid injection, which can lower the pH value of irrigation water and thus prevent chemical precipitation. Biological clogging is quite difficult to control. Chlorination is one of the most common and efficient ways used to prevent and treat emitter clogging caused by algae and bacteria (Dehghanisani et al., 2005). Rav-Acha et al. (1995) found that 5-8 mg/l of Cl₂ and 3-4 mg/l of ClO₂ are enough to control the activation of bacteria in effluent. Sahin et al. (2005) also found that antagonistic bacterial strains have the potential to be used as anti-clogging agents for the treatment of emitters in drip-irrigation systems. Zhang et al. (2007) studied the hydraulic performance of emitters with labyrinth channels and suggested several structural optimization schemes for the design of emitters with high anti-clogging capability. Emitter clogging varies based on effluent quality, emitter type, filtering methods and environmental conditions. The objectives of this work were to study the effect of magnetizing technology on solving the problem of emitter clogging and drip irrigation system performance.

MATERIALS AND METHODS

The experiment was established in the Demonstration Farm of the Faculty of Agriculture, University of Khartoum, Shambat, Sudan (latitude 15°36'N longitude 32°32'E and altitude 380 m above mean sea level). The climate is tropical semi-arid, hot dry summer and mild dry in the winter with a great seasonal variation in temperature.

There were two drip irrigation systems used one with treated wastewater and the other with normal water. The two systems were designed and installed on an area of 3500 m². Each system consisted of a storage tank, vacuum breaker (to remove the air from the system), screen filter, pressure gauge, fertilizing system, a main and a sub-main PVC pipelines and a 13 mm PE pipe laterals. From the storage tanks entire mainlines were buried 50 cm below the soil surface to prevent mechanical damage due to the movement of farm implements and human beings.

The standard procedure recommended by Choudhary and Kadam (2006) was followed to test the drip irrigation system. After reaching the steady-state flow condition, discharges of randomly selected emitters were measured volumetrically. The emission uniformities were computed using the following equation:

1. Emission uniformity

$$Eu = \frac{Q_{min}}{Q_{avg}} \times 100 \dots\dots\dots (1)$$

Where EU is field emission uniformity (%). Q_{min} is the minimum emitter discharge (lph) and Q_{avg} is the average emitter discharge (lph).

2. Irrigation efficiency

The overall application efficiency of drip irrigation (E_a) is defined by the following Vermeiren and Gobling (1990) equation: E_a = K_s × Eu (2)

Where K_s is ratio between water stored and that diverted from the field, it expresses the water storage efficiency of the soil. It takes into account unavoidable deep percolation as well as other losses (0.95). Eu is emission uniformity of drip irrigation system

RESULTS AND DISCUSSION

Irrigation water type and emitters discharge

In the first year the discharges were recorded 3.5, 2.7, 3.75 and 3.4 for normal water (NW), wastewater (WW), magnetized normal water (MNW) and magnetized wastewater (MWW) respectively. In the second year their respective recorded were 3.42, 2.6, 3.75 and 3.25 (Table 1). It is clear that WW and M.WW registered highly significant effect as compared with M.NW and NW. This result may be due to the fact that there is a decrease in emitter flow rate with WW due to the concentrations of physical (inorganic particles suspended), chemical (dissolved solids) and organic (organic matter) contaminants, which may often cause clogging in emitters. This finding is consistent with those of Ayers and Westcott, (1989) and Nakayama and Bucks (1981).

In general, emitter clogging is a major problem incurred in the operation of drip irrigation system utilizing wastewater effluent as stored in surface reservoirs. Narrow passages and small openings are inherent to all emitters of drip irrigation system. Therefore, all emitters in common are vulnerable to clogging due to physical, chemical and biological contaminations Nakayama and Bucks (1981).

Table 1. The average emitters discharges

Water type	Year I		Year 2	
	Discharge (L/h)	Pressure (bar)	Discharge (L/h)	Pressure (bar)
NW	3.50 ^b	1.8	3.42 ^b	1.8
WW	2.7 ^c	1.8	2.6 ^c	1.8
MNW	3.75 ^a	1.8	3.75 ^a	1.8
MWW	3.4 ^a	1.8	3.25 ^a	1.8

NW=Normal water, WW=Wastewater, MNW=Magnetized normal water and MWW=Magnetized wastewater

Irrigation water emission uniformity (Eu)

Fig. 2 shows that emission uniformity (Eu) differs with different types of irrigation waters. In the first year the emission uniformity recorded 89% 72%, 96% and 89% with NW, WW, MNW and MWW respectively. In the second season it recorded were 89%, 70%, 97% and 85% with NW, WW, MNW and MWW, respectively. The emission uniformity was excellent with MNW, was good with NW and MWW and was acceptable with NW in the first and second year according to Choudhary and Kadam (2006). This clearly indicates that magnetization of irrigation water improves the performance of drip emitters, reducing the effect of clogging by salt accumulation. This agrees with the findings of Basher (2006).

Irrigation efficiency (Ea)

The irrigation efficiency was high with MNW, NW, MWW and WW respectively, in the first and second year (Fig 3). These results indicate that magnetization of irrigation water improves the performance of drip irrigation system. This agrees with the findings of Basher (2006).

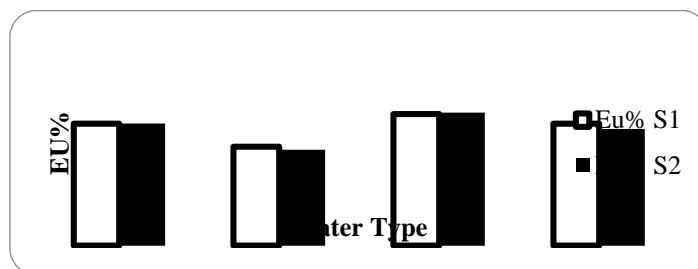


Figure 2. Emission uniformity (Eu) %

S1= year1, S2=year 2, NW=Normal water, WW=Wastewater, MNW=Magnetized normal water and MWW=Magnetized wastewater

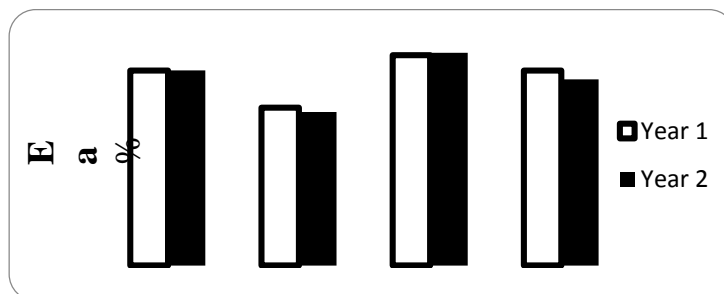


Figure 3. Irrigation efficiency (Ea) %

S1= year1, S2=year 2, NW=Normal water, WW=Wastewater, MNW=Magnetized normal water and MWW=Magnetized wastewater

CONCLUSION

Using drip irrigation system with treated wastewater is safer from an environmental view point. Magnetization of irrigation water improves the performance drip irrigation systems.

REFERENCES

- Ayers RS and Westcott DW. 1989. Water quality for agriculture. FAO Irrigation and Drainage paper 29rev.1. FAO, Rome.
- Basher DA. 2006. Evaluation of the effect of magnetizing water and seeds on crop production under open field. Unpublished M.Sc. Thesis. University of Khartoum, Sudan
- Capra A and Scicolone B. 2004. Emitter and filter tests for wastewater reuse by drip irrigation. *Agricultural Water Management*. (68): 135-149.
- Choudhary ML and Kadam US. 2006. Micro-irrigation for cash crops. Westville publishing house. New Delhi. India.
- Dehghanisani H, Yamamoto T, Ould Ahmad BA, Fujiyama H and Miyamoto K. 2005. The effect of chlorine on emitter clogging induced by algae and protozoa and the performance of drip irrigation. *Trans. ASAE* 48 (2), 519-527.
- Eltoum RA, Mohamed YZ and Bashir OB. 1998. Using of solar energy in water distillation, B.Sc. (Arabic) project, Dept. of Agric. Eng., Faculty of Agriculture, U. of K., Khartoum, Sudan.
- Haijun L and Guanhua H. 2009. Laboratory experiment on drip emitter clogging with fresh water and treated sewage effluent. *Agricultural Water Management*. (96):745-756.
- Hamdy A. 2001. Agricultural water demand management is a must for water saving an advanced short course on water saving and increasing water productivity challenges and options. Faculty of Agriculture, University of Jordan, Amman, pp. 618.1-618.30.
- Nakayama FS and Bucks DA. 1981. emitter clogging effects on trickle irrigation uniformity. *ASAE*, (24): 77-80.
- Nakayama FS and Bucks DA. 1991. Water quality in drip/trickle irrigation: a review. *Irrig. Sci.* 12, 187-192.
- Omer MAMS. 2003. Prospects of reusing of wastewater for irrigation under Sudan conditions. Unpublished M.Sc. Thesis. University of Khartoum, Sudan.
- Puig-Bargues J, Arbat G, Barragan J and Ramí' rez de Cartagena F. 2005. Hydraulic performance of drip irrigation subunits using WWTP effluents. *Agricultural Water Management* (77): 249-262.
- Rav-Acha CH, Kummel M, Salamon I and Adin A. 1995. The effect of chemical oxidants on effluent constituents for drip irrigation. *Water Res.* 29 (1), 119-129.
- Sahin U, Anapal O, Donmez MF and Sahin F. 2005. Biological treatment of clogged emitters in a drip irrigation system. *J. Environ. Manage.* 76, 338-341.
- Vermeiren L and Gobling GA. 1980. Localized irrigation and drainage. Paper No (36). Food and Agriculture Organization. United Nation. Rome.
- Zhang J, Zhao W, Wei Z, Tang Y and Lu B. 2007. Numerical and experimental study on hydraulic performance of emitters with arc labyrinth channels. *Comput. Electron. Agric.* 56, 120-129.